


Configuration/Specifications
Hardware Configuration

		M size	L size
		P/Z/S	
Image signal input unit	Camera	3-CCD camera	
	Illumination	Ring-shaped LEDs (R, G, B)	
	Image resolution	10, 15, 20 μm	
Main unit	Feed method	Belt	
	Line height	900 ± 15 mm	
	PCB carrier width adjustment	Automatic	
PCB fixing method		Outer frame	
Power supply		AC100 / 115 V / 120 V / 200 V / 220 V / 230 V / 240 V ± 10% (single phase)	
Air		0.4 to 0.6 Mpa	
Ambient operating temperature		+10 to +35°C	
Ambient operating humidity		35 to 80% RH (with no condensation)	
Weight		Approx. 500 kg	Approx. 850 kg
Dimensions		700(W)×900(D)×1,600(H) mm (Excluding Patlite signal tower)	920(W)×1,365(D)×1,600(H) mm (Excluding Patlite signal tower)

Functional Specifications

		M size			L size		
		P	Z	S	P	Z	S
Inspectable PCBs	Type	Post-printing	Post-placement (before reflow)	Post-reflow	Post-printing	Post-placement (before reflow)	Post-reflow
	Dimensions	50(W)×50(D) to 333(W)×255(D) mm			80(W)×50(D) to 510(W)×460(D) mm 80(W)×110(D) to 510(W)×460(D) mm (with PCB warpage correction unit)		
	Thickness	0.3 to 2.5 mm			0.3 to 3.0 mm		
Clearance		Above PCB: 20 mm (0.79 in) (standard), 40 mm (1.57 in) (optional) Below PCB: 40 mm (1.57 in)			Above PCB: 20 mm (0.79 in) (standard), 40 mm (1.57 in) (optional) Below PCB: 50 mm (1.97 in)		
Inspection items		Presence of solder, insufficient/excessive solder, solder shifting, grazing, bridging, spreading, leaking	Presence of solder, component shifting, polarity error, missing components, wrong components, solder balls, skewing, bridging, foreign objects	Presence of solder, wrong components, missing components, bridging, lifting, component shifting, fillets, wettability, lead bending, adhesive, solder balls	Presence of solder, insufficient/excessive solder, solder shifting, grazing, bridging, spreading, leaking	Presence of solder, component shifting, polarity error, missing components, wrong components, solder balls, skewing, bridging, foreign objects	Presence of solder, wrong components, missing components, bridging, lifting, component shifting, fillets, wettability, lead bending, adhesive, solder balls
Number of inspection points		40,000 lands/PCB max.	10,000 components/PCB max.		40,000 lands/PCB max.	10,000 components/PCB max.	
Data storage		Computer hard disk					
Component-specific inspection data library		Component types, groups, variations					
Inspection result output		PCB name, PCB ID, component name, type of fault, etc.					
Communications		Ethernet, RS-232C					
PCB feed mode		Through, turnback					
Reference position		PCB feed direction: left or right (selected at shipment); Longitudinal: Front or back (selected at shipment)					

Dimensions

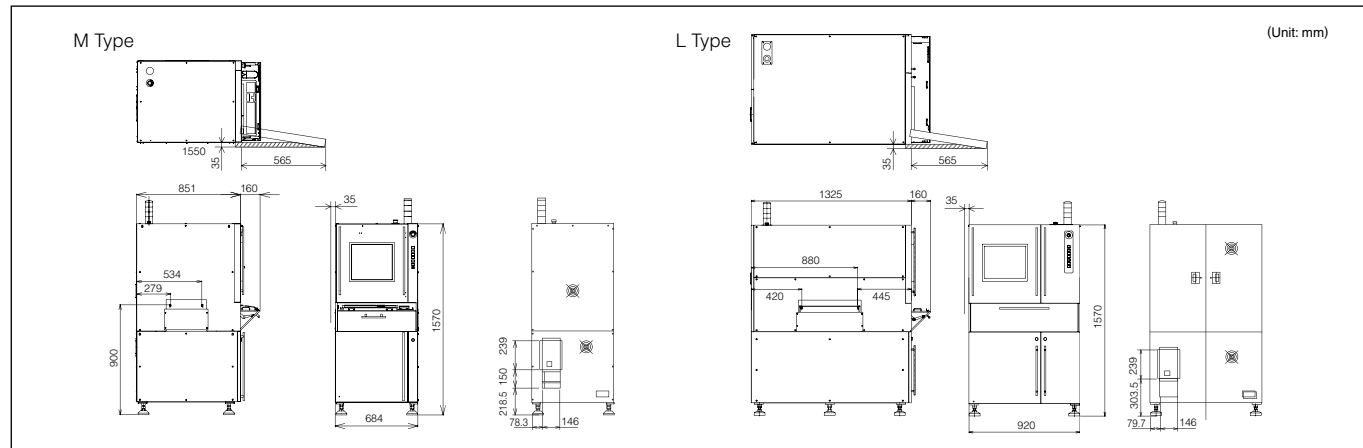

• This product may cause interference if used in residential areas.

OMRON Corporation
Industrial Automation Company

Sensing Devices Division H.Q.
Vision Systems Division
Sales Department
 Shinagawa Front Bldg. Conference 7F
 2-3-13 Kounan Minato-ku Tokyo
 108-0075 JAPAN
 TEL +81-3-6718-3550 FAX:+81-3-6718-3553

OMRON INDUSTRIAL AUTOMATION
(CHINA) CO., LTD.
 Room A902, Innocation Science & Technology
 Plaza I, Tian an Cyber Park, Futian District,
 Shenzhen, Guangdong 518040, China
 TEL:+86-755-8359-9028 FAX:+86-755-8359-9628

OMRON EUROPE B.V.
 Wegalaan 67-69, 2132 JD, Hoofddorp
 TEL:+31 (0)23 568 13 00 FAX:+31 (0)23 568 13 88
<http://inspection.omron.eu/>

OMRON ELECTRONICS LLC
 One Commerce Drive Schaumburg Illinois
 60173, U.S.A.
 TEL:+1-847-843-7900 FAX:+1-847-843-7787
 Email: aoi.request@omron.com
<http://www.omron247.com>

OMRON ELECTRONICS KOREA CO., LTD.
 21F, Kyobo Tower B Wing, 1303-22,
 Seocho-Dong, Seocho-Gu, Seoul, Korea 137-920
 TEL:+82-2-3483-7789

OMRON ASIA PACIFIC PTE LTD
 438A Alexandra Road #05-05/08 (Lobby 2)
 Alexandra Technopark Singapore 119967
 TEL:+65-6547 6789 FAX:+65-6547 6769
<http://www.omron-ap.com/aoi/>

Authorized Distributor:

NEW

Inline PCB Inspection System
VT-RNSII

OMRON

For Even More Efficient SMT Production
Introducing the 2nd Generation RNS Series

VT-RNSII



realizing

Make Your SMT Production More Efficient while Achieving Zero Defects



PCB Inspection System

VT-RNS II

Four advantages only Omron can provide

Omron's second-generation, in-line PCB inspection system the VT-RNS II, delivers fast and reliable results to prevent defective boards from reaching your customer. We simplified the inspection program generation process with our easy-to-use EzTS software to efficiently handle high mix/low volume production. Omron has reduced post-reflow inspection times by 20% by utilizing faster shutter speeds and improved image processing.

NEW

[Faster]

Improved image processing for faster post-reflow inspections



[Quick Setup]

So easy that anyone can set up inspection programs.

EzTS (Ez-image Teaching) system makes setting-up easy for anyone

[Highly Accurate]

Omron's 3CCD camera and Color Highlight Technology provide the most accurate inspection capability.


3-CCD camera plus Color Highlight system

[Expandable]

Omron has the expertise to boost your production efficiency.

Q-upNavi provides total support for process improvement


Addresses a range of issues throughout the surface-mounting industry.

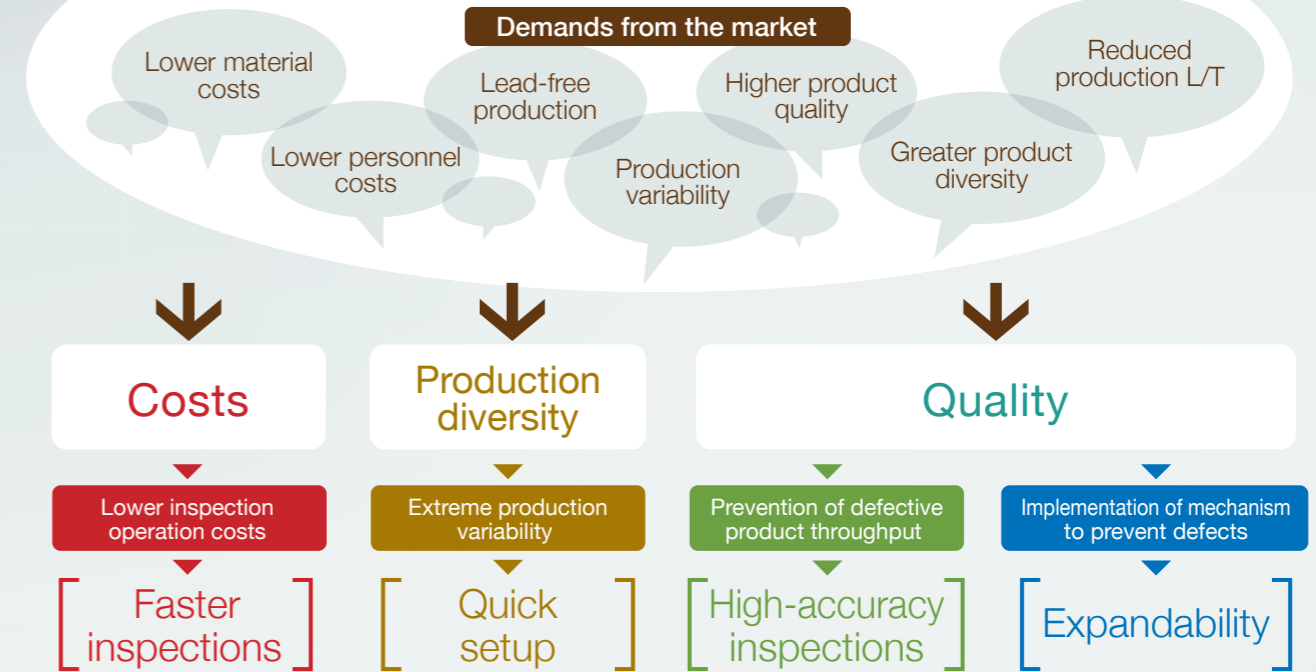

The RNS Series continues to address demands for "true production efficiency" for advanced PCBs.

World Class Engineering Support

Omron has built a global support organization for our customers with sales and service offices in some 70 locations covering the major manufacturing centers around the world. Regional coordination ensures consistent, high quality support where ever you choose to set up production. Services are tailored to your needs and include technical support and training in system setup, operations and maintenance.

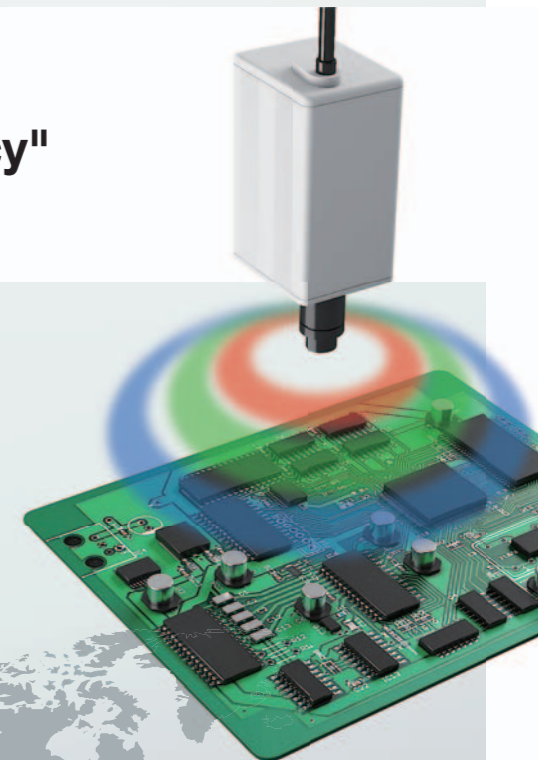

Make Your SMT Production More Efficient while Achieving Zero Defects

Maximize your SMT line throughput with the use of quick setup and highly accurate inspection capability.



PCB Inspection System

VT-RNS II

Four advantages only Omron can provide

Omron's second-generation, in-line PCB inspection system the VT-RNS II, delivers fast and reliable results to prevent defective boards from reaching your customer. We simplified the inspection program generation process with our easy-to-use EzTS software to efficiently handle high mix/low volume production. Omron has reduced post-reflow inspection times by 20% by utilizing faster shutter speeds and improved image processing.

NEW
[Faster]
Improved image processing for faster post-reflow inspections



[Quick Setup]

So easy that anyone can set up inspection programs.
EzTS (Ez-image Teaching) system makes setting-up easy for anyone

[Highly Accurate]

Omron's 3CCD camera and Color Highlight Technology provide the most accurate inspection capability.
3-CCD camera plus Color Highlight system

[Expandable]

Omron has the expertise to boost your production efficiency.
Q-upNavi provides total support for process improvement

Fast production system startup and stable operation with no downtime. Inspection system performance is the key.



The VT-RNS II delivers outstanding performance at every step of production. Easy-to-set initial inspection parameters are ready for immediate use to perform high accuracy inspections. Data collected from the inspection stations can be analyzed for root cause analysis of defects for ongoing process improvement. Omron gives you the tools to increase productivity on your PCB assembly lines.

1 Program setup
Create inspection programs quickly for immediate line operation

[Quick Setup]

Features EzTS for simple automated generation of inspection programs

The easy-to-use Ez-Image Teaching (Ez-IT) inspection program generation software is equipped as a standard feature, enabling anyone to quickly and easily create inspection programs tailored to the PCB. The software also validates the inspection programs so that they can be implemented on the production line without delay.

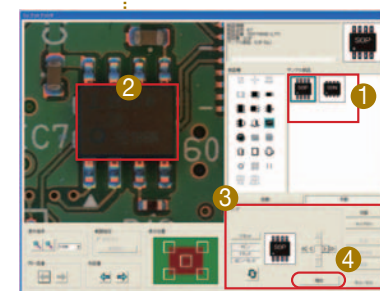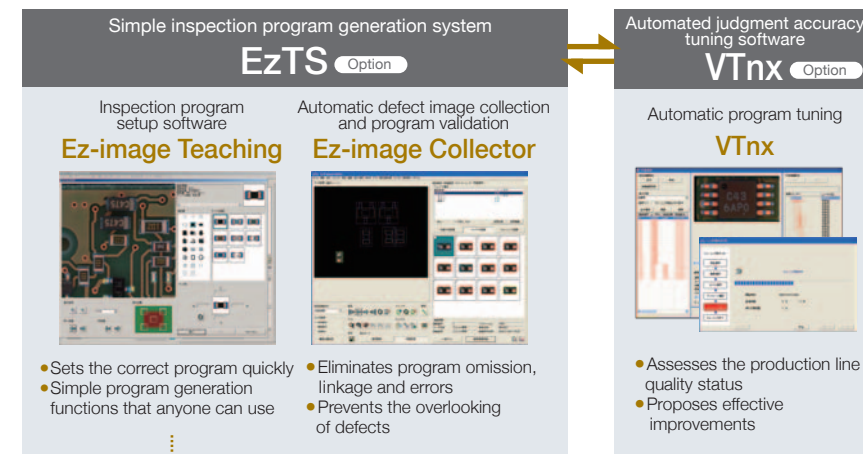

- Ez-image Teaching**
Simple program generation procedure
- 1 Select the most appropriate model.
 - 2 Match it to the component shape
 - 3 Adjust the angle, etc
 - 4 Run

* Note that this is not supported for some PCBs. Contact your Omron sales representative for details.


2 Inspection
20% Faster, highly accurate inspection system

[Faster]

Improved image processing for faster post-reflow inspections

In addition to processing faster than that of conventional models, the VT-RNSII also features revamped imaging processes to achieve significantly faster outcomes. This enables the system to cope with the most demanding production environments.

Processing Speed compared with first generation VT-RNS

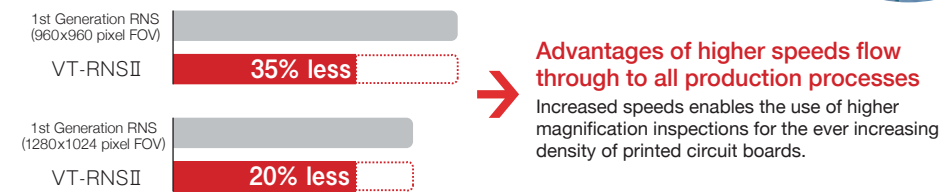

Advantages of higher speeds flow through to all production processes
Increased speeds enables the use of higher magnification inspections for the ever increasing density of printed circuit boards.


* Only on post-reflow inspection systems. Effectiveness varies depending on the PCB inspected.
* Inspection speeds for post-printing and post-placement models are equivalent to conventional models.

[Highly Accurate]

Uses Omron's 3-CCD and Color Highlight Technology

Omron pioneered the development of 3-CCD and Color Highlight Technology in PCB inspection systems to obtain correct measurements with high levels of inspection accuracy.

Color Highlight system



The Color Highlight technology provides a way of obtaining accurate information on solder joint angles in the form of image data.


3 Process Improvement
Root cause defect analysis for a Process Improvement Support System

[Expandable]

Q-upNavi provides total support for process improvement, root cause defect analysis and countermeasure implementation

Q-upNavi is quality control software that analyzes inspection results and provides feedback to the production line. This software enables operators to implement corrective procedures that will prevent future defects from occurring regardless of their level of experience or expertise.

Process Improvement Support System

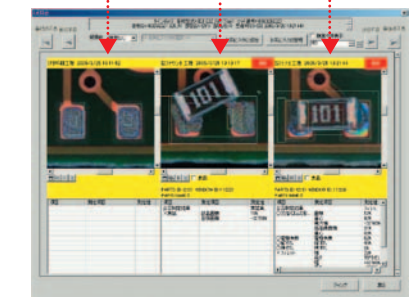

Q-upNavi process comparison and analysis

Q-upNavi helps you implement procedures to ensure that defects do not occur.